

INSTALLATION INSTRUCTION Warranty: 2 years

Operating range


Working temperature

Tmax 25°C / 77°F

Pressure


P optimal: 2.0 - 4.5 bar / 0.2 - 0.45 MPa / 30 Psi - 65 Psi
P max: 8.5 bar / 0.85 MPa / 125 Psi
P min: 1.5 bar / 0.15 MPa / 22 Psi

Volume rate \dot{V}

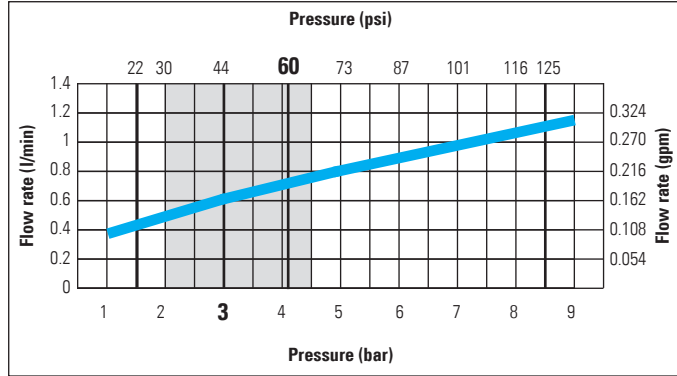

1

Flush pipe!




2

Tap mounting


3

Handling



4

Leakage Check

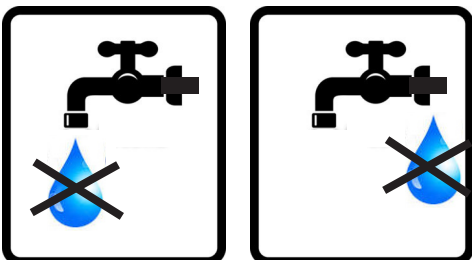

www.swissecotap.ch

Swiss Eco Tap - the acqua saver / CH-8044 Zürich / +41 44 268 44 90
info@swissecotap.com / Fax +41 44 268 44 91

INSTALLATION INSTRUCTION Warranty: 2 years

Operating range


Working temperature

Tmax 25°C / 77°F

Pressure


P optimal: 2.0 - 4.5 bar / 0.2 - 0.45 MPa / 30 Psi - 65 Psi
P max: 8.5 bar / 0.85 MPa / 125 Psi
P min: 1.5 bar / 0.15 MPa / 22 Psi

Volume rate \dot{V}

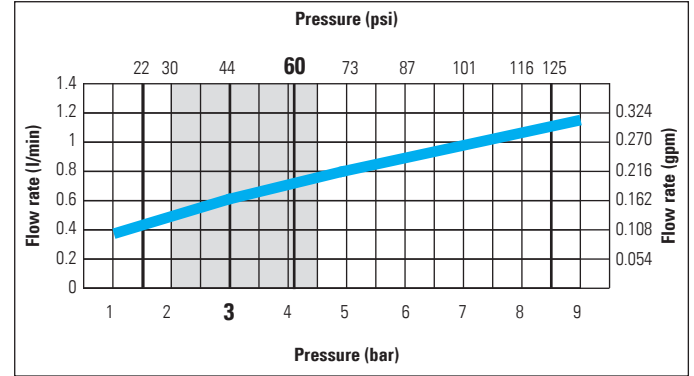

1

Flush pipe!




2

Tap mounting


3

Handling



4

Leakage Check

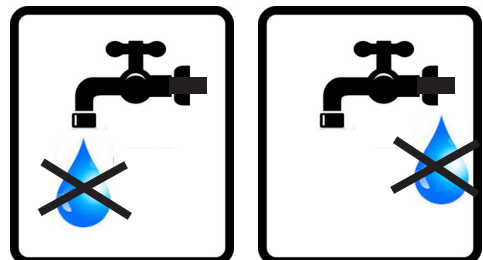

www.swissecotap.ch

Swiss Eco Tap - the acqua saver / CH-8044 Zürich / +41 44 268 44 90
info@swissecotap.com / Fax +41 44 268 44 91